





JOTUN MACHINERY

Automatic CNC Polishing Grinding Machine

№ 电话(Tel): +86-551-62105090

□ 手机 (Mob) : +86 15715512852 (whatsapp) ② 网站 (Web) : www.jotunpolishing.com ☑ 邮箱 (Email): info@jotunmachinery.com

② 地址(Add.): No.69 Wangjiang Road, Hefei, Anhui, China











■ About Jotun

Jotun company specialized in metal surface polishing grinding machine and welding seam treatment equipment fabrication. Widely for all kinds of metal tank shell, dished end, flat sheet ,round tube pipe. For inside and outside surface polishing, to get a bright or mirror surface. We always focused on research development and innovation, and has recently developed water polishing to meet environment management certification.

Application

Pharmaceutical industry, food, water purification, water supply, chemical, and new energy. Including elliptical dish,cone dish head,spherical shell, butterfly shell, pharmaceutical stainless steel tank, pressure vessel, brewery, cylinder, cosmetic, sanitary, reaction kettle, fermentation tank, sterilizer, disinfection cabinet, filter, and LNG etc.

Market

Our products have exported to more than 60 countries. America, Australia, Germany, Italy, Portugal,Ireland,Denmark,Poland,Russia,Turkey,Israel,South Korea,Malaysia,Vietnam,India,Brazil, Argentina, Mexico, Peru, South Africa, etc

Implement

Europe Quality, Reasonable prices, Efficient delivery, Good services

■ Cooperation partners

















Workshop

O2 / PAGE



















■ Jotun Customer Case & Over-seas Service



OTUN











Jotun Customer Case & Over-seas Service

















IPRODUCTCATALOG

		产品目录
06	JT-1 Tank polishing machine	
07	JT-1 Flap Wheel polishing machine	
08	JT-2 Dish end polishing machine	
09	JT-2-IN-1 Tank and Dish end polishing mad	hine
10	JT-CNC Tank and Dish end polishing mach	ine
11	JT-CZJ Industrial polishing machine	
12	JT-WY Round tube polishing machine	
13	JT-NY Round tube inner polishing machine	
14	JT-PM Flat sheet polishing machine	
15	JT-XTC Handle polishing machine	
16	JT-SDJ Metal deburring machine	











JT-1 Tank polishing machine








Technical Parameters	
Tank/shell diameter	Ф200-5000 (customized)
Beam stroke	2000-4000mm
Main motor power	4KW/5.5KW
Motor Brand	WN/SIEMENS/ABB
Control System	Manual
Polishing Materials	Abrasive belt, Flap wheel, Cloth wheel, etc.
Roller table capacity	1/2/5/10tons
Surface Roughness	Ra≤0.25um

- 1. Grinding with abrasive belt, high efficiency, low noise and less dust.
- 2. Since the surface roughness is reduced after the abrasive belt is used, it can be reused. In grinding with a slightly higher level of abrasive belt, the cost is correspondingly reduced.
- 3. The work piece rotation and lateral feed are variable frequency step less speed regulation to further improve work efficiency.



JT-1 Flap Wheel polishing machine

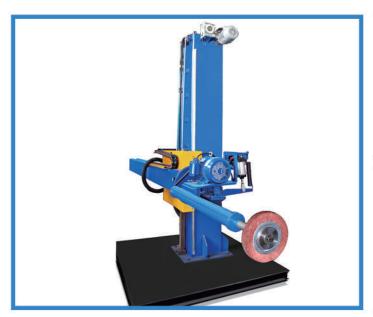





	Technical Parameters	
Tank/shell diameter	Ф200-1000 (customized)	
Beam stroke	1000-1500mm	
Main motor power	4KW	
Motor Brand	WN/SIEMENS/ABB	
Control System	Manual	
Polishing Materials	Flap wheel	
Roller table capacity	1ton	
Surface Roughness	Ra≤0.25um	

Product Features

- 1. Grinding with flap wheel, can polish the inner surface of small diameter tanks.
- 2. The work piece rotation and lateral feed are variable frequency step less speed regulation to further improve work efficiency



JT-2 Dish end polishing machine







Technical Parameters	
Dish end diameter	400-5000mm
Beam stroke	2000-4000mm
Main motor power	4KW/5.5KW
Motor Brand	WN/SIEMENS/ABB
Control System	Manual
Polishing Materials	Abrasive belt,Flap wheel,Cloth wheel,etc.
Turntable capacity	1/2/5/10tons
Surface Roughness	Ra≤0.25um

- 1. Grinding with abrasive belt, high efficiency, low noise and less dust.
- 2. Since the surface roughness is reduced after the abrasive belt is used, it can be reused. In grinding with a slightly higher level of abrasive belt, the cost is correspondingly reduced.
- 3. The work piece rotation and lateral feed are variable frequency step less speed regulation to further improve work efficiency.



JT-2-IN-1 Tank and Dish end polishing machine








Technical Parameters	
Tank/dished diameter	200-5000mm
Beam stroke	2000-5000mm
Main motor power	4KW/5.5KW
Motor Brand	WN/SIEMENS/ABB
Control System	Manual
Polishing Materials	Abrasive belt, Flap wheel, Cloth wheel, etc.
Roller table capacity	1/2/5/10tons
Surface Roughness	Ra≤0.25um

Product Features

- 1. Grinding with abrasive belt, high efficiency, low noise and less dust. It can use flap wheel or cloth wheel to polish, mirror surface can be achieved.
- 2. Integrated belt polishing machine, which can respectively polish different parts such as tank body and head, grinding, and select the abrasive belt grinding head with processing precision Ra ≤ 0.2um (mirror effect). Both work piece rotation and lateral feed are variable frequency step less speed regulation, which further improves work efficiency.



JT-CNC Tank and Dish end polishing machine

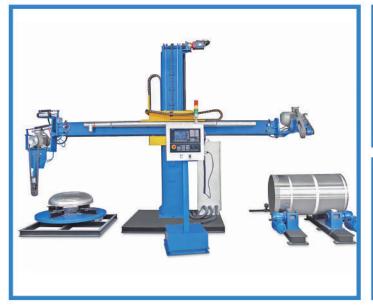





	Technical Parameters	
Tank/shell diameter	2000-5000mm	
Beam stroke	2000-4000mm	
Main motor power	4KW/5.5KW	
Motor Brand	SIEMENS/ABB	
Control System	CNC Siemens	
Polishing Materials	Abrasive belt,Flap wheel,Cloth wheel,etc.	
Roller table capacity	1/2/5/10tons	
Surface Roughness	Ra≤0.25um	

- 1. Grinding with abrasive belt, high efficiency, low noise and less dust. It can use flap wheel or cloth wheel to polish, mirror surface can be achieved.
- 2. Use CNC control system. Automatic polishing of the work piece can be achieved only by setting the program. This method can save a lot of manpower and time, and can have a better polishing effect.



JT-CZJ Industrial polishing machine





Technical Parameters	
Tank/shell diameter	200-5000mm
Vice column stroke	1000-3000mm
Main motor power	4KW/5.5KW
Motor Brand	WN/SIEMENS/ABB
Control System	PLC/CNC
Polishing Materials	Abrasive belt,Flap wheel,Cloth wheel,etc.
Roller table capacity	1/2/5/10tons
Surface Roughness	Ra≤0.25um

Product Features

 The lifting of the working arm adopts the turbine-vortex reducer and the sprocket, and the chain mechanism drives. Through the use of the counterweight, the lifting operation is stable, the vibration is small, and the mechanical wear is not easy. Since the reducer has a certain self-locking property, and the lift motor uses a brake motor, the work arm can be stopped and locked by lifting it to any position.



JT-WY Round tube polishing machine





	Technical Parameters	
Round pipe diameter	40-600mm	
Pipe length	1000-14000mm	
Main motor power	4KW/5.5KW	
Motor Brand	WN/SIEMENS/ABB	
Control System	PLC	
Polishing Materials	Abrasive belt,Flap wheel	
Surface Roughness	Ra≤0.25um	

- 1. The round tube polishing machine has high efficiency, good finish, and extensive and durable abrasive tools.
- 2. The machine has simple and convenient operation, stable product performance and low noise, etc., which are well received by users. The product is designed to meet the needs of different industries using optional cooling systems and dust collection and dedusting systems. Users who reserve fan ports on this machine can also install dust removal fans by themselves.



JT-NY Round tube inner polishing machine







Technical Parameters	
Round tube inside diameter	19-200mm
Round length	6200mm
Total power input	20KW
Motor Brand	WN/SIEMENS/ABB
Control System	PLC
Polishing Materials	Flap wheel
Surface Roughness	Ra≤0.25um

Product Features

1. This machine is specially designed for the inner hole polishing machine of a large number of stainless steel round tubes, and the efficiency is 5 times faster than the traditional soil polishing machine. This machine is used for dry polishing. The polishing head has 6 polishing heads and is distributed in the left 3 heads and right 3 heads. At the same time, the tubes are polished at the same time. The utility model has the functions of automatic feeding and automatic feeding, and the steel pipe in the polishing process does not need to be turned over, and the machine has the characteristics of high automation, simple operation and high production efficiency.



JT-PM Flat sheet polishing machine







	Technical Parameters	
Flate sheet width	100-4000mm	
Flate thickness	≥5mm	
Main motor power	11kw*2	
Motor Brand	WN/SIEMENS/ABB	
Control System	PLC	
Polishing Materials	Abrasive belt,Flap wheel	
Surface Roughness	Ra≤0.8um	

- 1. The grinding head group is two sets of constant pressure floating belt grinding heads for coarse and fine grinding of the work piece.
- 2. Due to the grinding method and the grinding method of the work piece, the length of the work piece is almost unlimited.
- 3. Can polish with water cooling system.



JT-XTC Handle polishing machine







Technical Parameters	
Efficiency	6 square meters per hour
Precision	Ra \leq 0.4 μ m (mirror finished)
Belt specification	200*50/75/100mm
Contact wheel specification	200*50/75/100mm
Belt speed	30 m/s
Belt granule	60 - 600 #
Motor Power	Y132LS1-2,3 KW
Weight	130 KG

Product Features

Small belt grinding machine widely used for sheet metal surface rust removing, hairline, sanding, grinding, and polishing.

JT-SDJ Metal deburring machine









Technical Parameters	
Max grinding width	400/600/800/1000/1300/1500mm(customized)
Max grinding height	100mm
Feeding speed	0.5-6m/min
Grinding mode	Double belt,belt+flap wheel
Controller	PLC/Siemens CNC system
Function	Deburring ,hairline

Product Features

Mainly for metal laser cuttings parts, remove oxide scale, oxide layer, polish and wire drawing, remove rust, sanding and grinding.






Consumables & Optional







Hemp wheel



Abrasive belts



Cloth wheel



Contact wheel



Wax barrel with gun

■ JOTUN TO THE WORLD









